



Corrosion Resistance Titanium Niobium Alloy Target Ti90Nb10 Material For Liquid Crystal Display,

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: N/M
- Certification: ISO9001:2015 certification
- Model Number: CDX-20220331G
- Minimum Order Quantity: 20 piece
- Price: Negotiable
- Packaging Details: plywood case
- Delivery Time: 5-35 working days
- Supply Ability: 50000KG/month



Product Specification

- Name: Evaporated Coating Particles High Purity Metal Titanium Target Ti 5N 6N
- Key Words: Titanium Sputtering Target
- Application: Liquid Crystal Display, Electronic Information
- Density: 4.75g/cm³
- Material: Titanium Niobium Alloy
- Highlight: **Liquid Crystal Display Sputtering Target, Niobium Alloy Sputtering Target Materials, Corrosion Resistance Metal Sputtering Target**



for more products please visit us on titanium-part.com


Product Description


Titanium Niobium Alloy Target TiNb Target Ti90Nb10 Ti80 Nb20



Our Product Introduction

for more products please visit us on titanium-part.com

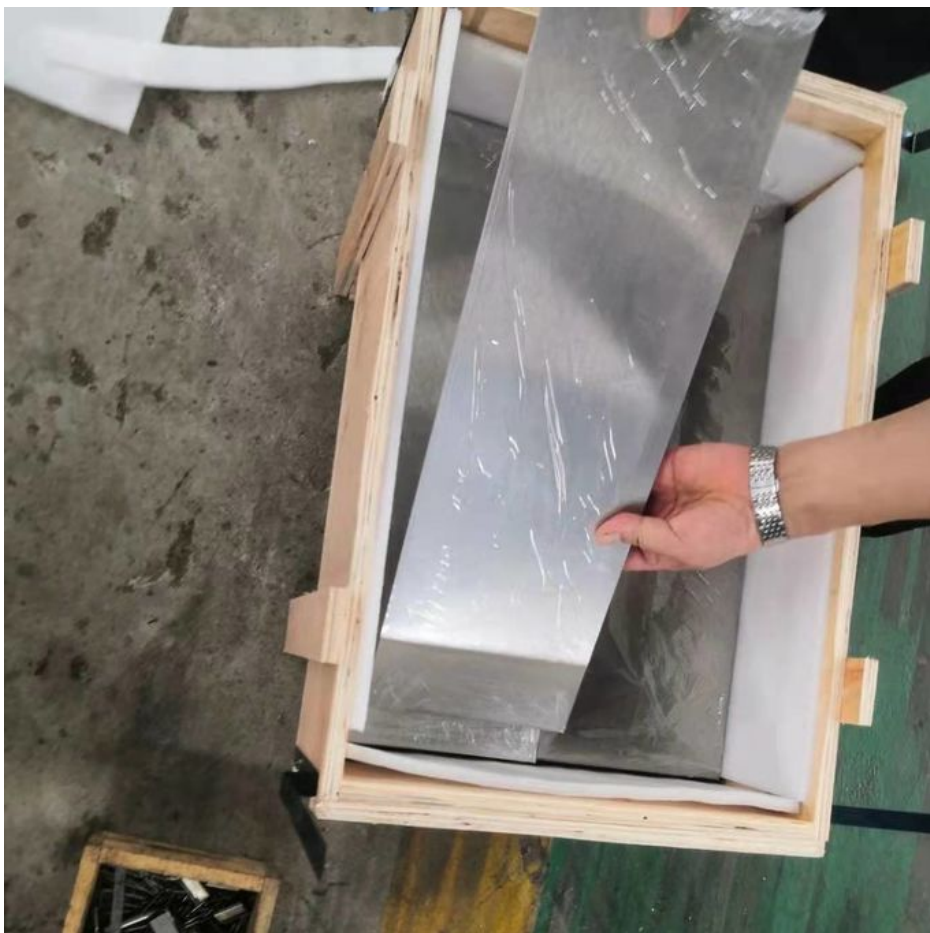

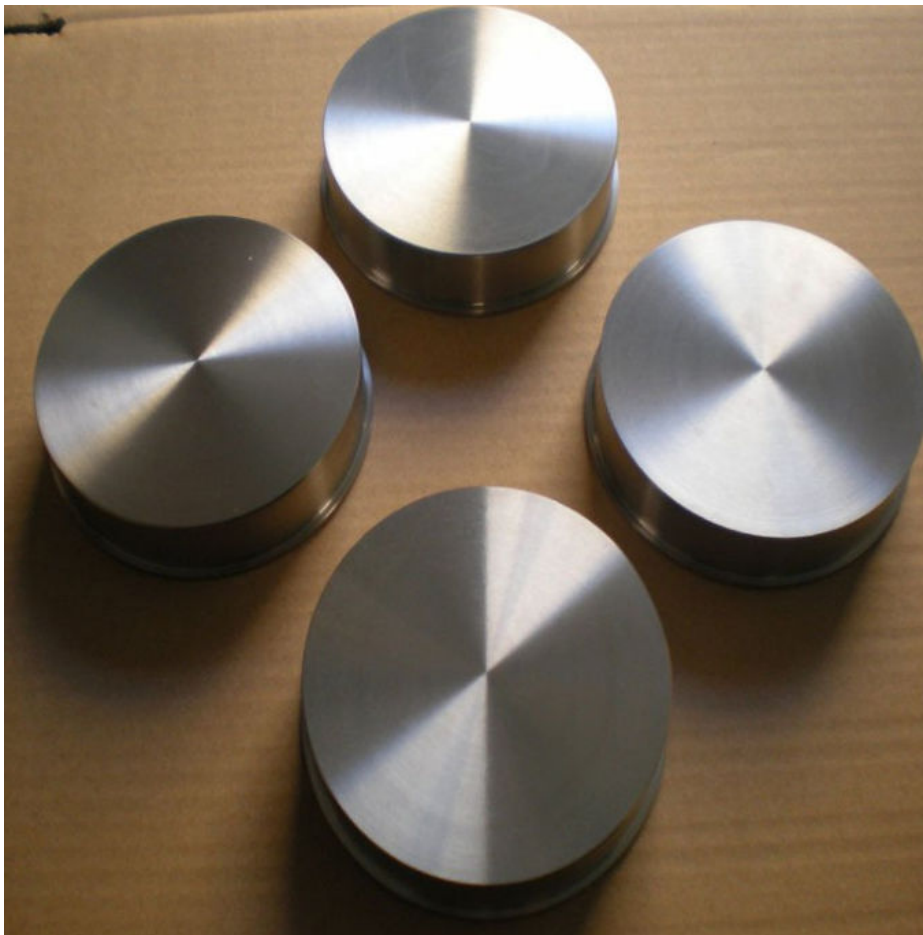

Usually we will provide a quality inspection report like this with the goods, which shows the chemical composition and physical properties

宝鸡丞德鑫钛金属材料有限公司
Baoji Quality Metals Co., Ltd

质量证明书 Quality Certificate

证书编号 (Certificate No.): CDS2018031-01

合同号 Contract No.	产品名称 Description	牌 号 Designation No.	批 号 Lot No/ 号 号 Heat No.	状态 Condition	规格 Size(mm)	数量 Quantity	产品标准 Product Standard											
/	Titanium bar	GR1	YTL20180126	M	16mm ×1000 mm	sample	ASTM B348											
室温力学性能 Tensile test	试验温度 (℃) Test Temperature	抗拉强度 Rm (MPa) Tensile Strength	屈服强度 Rp _{0.2} (MPa) Yield Strength	断后伸长率 A(%) Elongation	断面收缩率 Z (%) Reduction of area	水压试验 Hydraulic pressure test	扩口试验 Expanding test		压扁试验 Flattening test									
	Result	526	400	26	50	合格	合格		合格									
其 它 Others	弯曲试验 r° Bend Test	低倍组织 Macrostructure	高倍组织 Microstructure	外形尺寸 Dimensional Inspection	表面质量 Visual Inspection	探伤检验 Ultrasonic Inspection		/										
	/	/	/	合格	合格	ok		/										
化 学 成 份 Chemical Composition (%)																		
Result	Ti	Al	Su	/	/	/	/	C	N	H	O	Residual element						
	Remainder	/	/	/	/	/	/	0.11	0.06	0.02	0.001	0.07	≤0.10	≤0.30				
编制：兰宝霞 Prepared by											批准：兰宝霞 Approved by				报告日期：2018年3月15日 Report Date			
质量检验章																		

Titanium-niobium sputtering targets are mainly used in the electronics and information industries, such as integrated circuits, information storage, liquid crystal displays, laser memory, electronic control devices, etc.; can also be used in the field of glass coating; can also be used in wear-resistant materials, high temperature Corrosion resistance, high-end decorative products and other industries.

1. Titanium-niobium target specifications: national standard or processed according to customer requirements and drawings.
2. Surface quality of titanium-niobium target: the surface is clean and smooth, without peeling, folding, pores, cracks and other defects.
3. Titanium-niobium target packaging: Use woven bags, plastic foam, cardboard boxes, wooden boxes and other packaging that meet the transportation standards according to the specifications and

dimensions of the goods to ensure safe transportation. Surface quality: The surface is clean and smooth, and there should be no defects such as cracks, folds, peeling, and pinholes. Reminder: Please clearly communicate with the customer service the detailed requirements of the baby's specifications, material grades, and use environment when purchasing the baby, so as to avoid unnecessary troubles. Commonly used sizes are in millimeters (mm) by default.



Baoji Luox Quality Metals Co., Ltd.



+8613911115555



test@test.com



titanium-part.com

GAOYA INTERSECTION, BAOTAI ROAD GAOXIN DISTRICT, BAOJI SHAANXI CHINA